

ASSEMBLY INSTRUCTIONS

Club Large Hexagonal Flush Mount


Item # CH04111

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

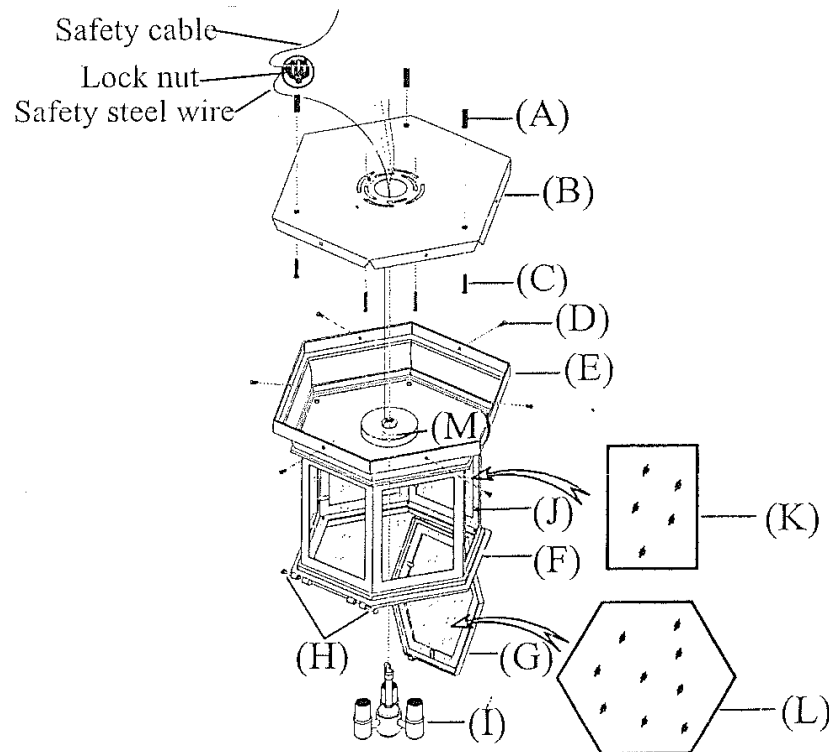

1. Open door (G) by loosening locking pins (H).
2. To install glass panel (L) provided to front frame (G), make sure metal tabs (J) are flipped against the opening of the frame. Place glass panel (L) to front frame and secure glass panel (L) by bending back metal tabs (J) toward the glass panel. To install rest six glass panels (K) into side frames and secure with metal tabs on the frame.
3. Attach the top hook on the candelabra assembly (I) to the loop (M).
4. Remove mounting plate (B) from lantern base (E) by removing base screws (D) and set aside.
5. Place mounting plate (B) on the ceiling outlet box, use mounting plate (B) as a template, mark center points for four mounting holes on the mounting plate (B).. Remove mounting plate (B)
6. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
7. Connect the safety steel wire from the fixture to the safety cable from ceiling with lock nut.
8. Connect the hot wire from fixture (with wording) to the hot junction box wire from the outlet box (usually black). Fasten them together with a plastic wire connector provided and wrap connection with electrical tape.
9. Repeat this procedure for the neutral wire from the light fixture (without wording) to the wire from the outlet box (usually white).
10. Connect ground wire from the light fixture (bare copper) to the ground wire form outlet box.

ASSEMBLY INSTRUCTIONS

Club Large Hexagonal Flush Mount


Item # CH04111

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

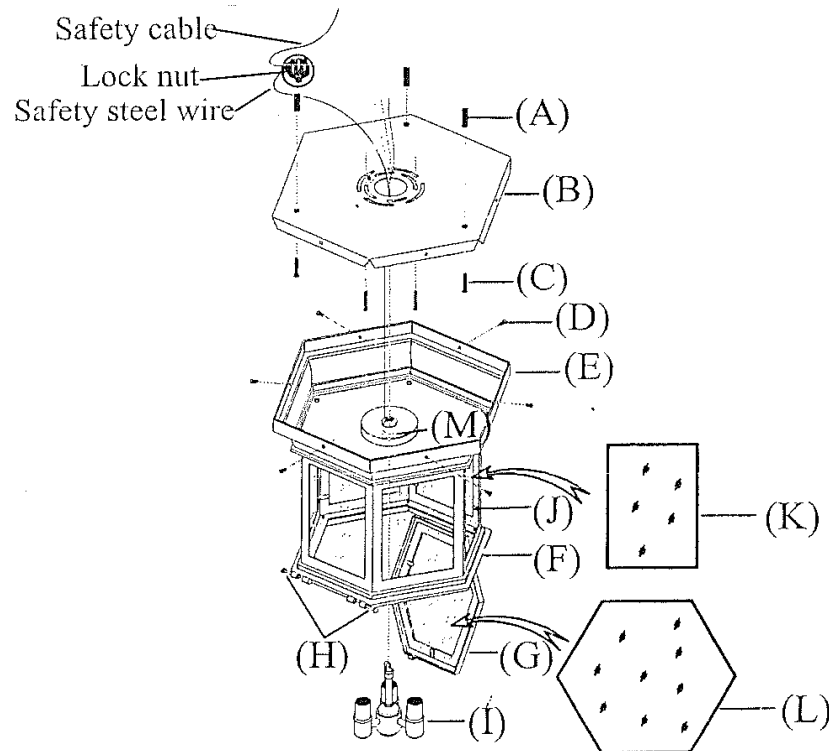

11. Affix mounting plate (B) to the ceiling outlet box by aligning holes with center hole of plastic anchors (A), inserting mounting screws (C) to secure mounting plate (B) to the wall.
12. Attach lantern base (E) to mounting plate (B) and tighten with base screws (D).
13. Insert light bulbs (not included) into sockets.
14. Close the door (G) by inserting locking pins (H).
15. INSTRUCTIONS FOR MOUNTING FIXTURE OUTDOORS AND/OR IN WET LOCATION:
 - A.) Mounting surface should be clean, dry, flat, and 1/4" larger than canopy/ fixture base on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
 - B.) With silicone (ex. GE-108) caulk compound, caulk completely around where back of canopy meets the wall surface to prevent water from seeping into the outlet box.